

MACHEREY-NAGEL PF-3 COD and NANOCOLOR®




The perfect team for COD analysis

- Compact photometer with intuitive menu guidance
- Tough and water-proof according to IP 68
- Mobile use right at the point of interest
- more than 9 different measuring ranges with just one instrument

PF-3 COD and NANOCOLOR®

Reliable COD analysis

COD levels play a major role in assessing communal and industrial waste water. As a sum parameter indicating the organic load of waste water, COD is one of the most important parameters in waste water analysis. Among others, COD values are used to calculate and monitor the purification capacities of waste water plants. The PF-3 COD together with the user friendly NANOCOLOR® tests is ideally suited to obtain information on the COD content (2–60000 mg/L) easily and directly at the place of sampling.

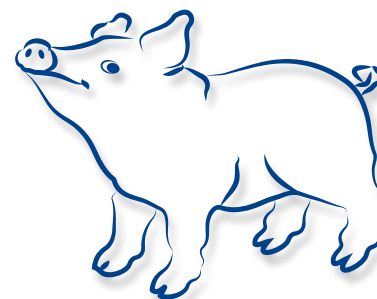

PF-3 COD benefits at a glance



Small and compact

- Handy and light weight
- Glass-fiber reinforced housing
- Water proof according to IP 68
- Shock-resistant optics

Ideal for all your analysis needs in the lab and right at the point of interest



Easy and convenient

- Fully developed menu structure using just 4 buttons
- Optional storage for just one O-measurement
- Results in different units
- Open cuvette slot

Safe results and convenient operation



Smart and clever

- Runs on standard or rechargeable batteries
- Free of charge data export software
- Add new tests and parameters anytime
- Power supply and data transfer via USB port

Flexible use and easy data administration

Technical data compact photometer PF-3 COD

Type:	LED photometer with 3 interference filters
Wavelengths:	365 nm, 450 nm, 595 nm
Wavelength accuracy:	± 2 nm, bandwidth at half transmission 10–12 nm
Measuring modes:	Pre-programmed MN-tests
Cuvette holder:	Tubes 16 mm OD
Memory:	50 results
Display:	Backlit graphic display, 64 x 128 pix, all important data at a glance: results with unit, date, time
Operation:	Self-explanatory menu guidance, foil keypad, test selection via parameter lists
Power supply:	3 AA batteries, rechargeable batteries, USB interface; optional internal accu-pack
Housing:	Water proof, IP 68 certified
Dimensions:	170 x 95 x 68 mm



This device complies with the following directives: EMC Directive 2014-30-EU; LVD Directive 2014-35-EU



www.mn-net.com

PF-3 COD and NANOCOLOR®

NANOCOLOR® benefits at a glance

Reliable and accurate

- Intuitive handling and high measurement accuracy
- Simple chemical-analytical methods
- Reaction principles based on international standards (DIN, EN, ISO)
- Low interference susceptibility ensures safe results

High measurement safety for reliable water analysis



Precise and versatile

- Pre-dosed tubes for quick and easy measurements
- Reaction and detection in the same tube
- No direct contact with chemicals
- Ideal for routine analytics and self-monitoring

Especially high accuracy due to pre-dosed reagents



Fair and economical

- Individual combination of reagent bundles
- Free of charge seminars and product training
- Competent customer service by highly educated and experienced professionals
- Replacement instruments immediately available in case of repairs

Consistently fair concept with impressive price-performance ratio



NANOCOLOR® tests running on the PF-3 COD

NANOCOLOR® test		Measurement range	Test number	No. of tests	REF
COD 40*	ISO 15705	2–40 mg/L O ₂	0–27	20	985 027
COD 60*	ISO 15705	5–60 mg/L O ₂	0–22	20	985 022
COD 160*	ISO 15705	15–160 mg/L O ₂	0–26	20	985 026
COD 600*	ISO 15705	50–600 mg/L O ₂	0–30	20	985 030
COD 1500*	ISO 15705	100–1500 mg/L O ₂	0–29	20	985 029
COD 4000*		400–4000 mg/L O ₂	0–11	20	985 011
COD 10000*		1.00–10.00 g/L O ₂	0–23	20	985 023
COD 15000*		1.0–15.0 g/L O ₂	0–28	20	985 028
COD 60000*		5.0–60.0 g/L O ₂	0–12	20	985 012
COD LR 150	ISO 15705	3–150 mg/L O ₂	0–36	20	985 036
COD HR 1500	ISO 15705	20–1500 mg/L O ₂	0–38	20	985 038

* These products contain harmful substances which must be specially labeled as hazardous. For detailed information please see MSDS.

